



FC/FE HIGH PROOF HIGH RANGE SWITCHES



FC



PRESSURE CAPSULE DETAILS

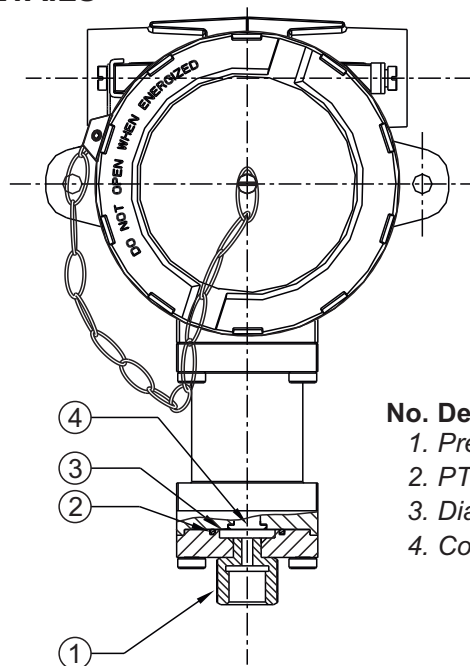


No. Description

1. Pressure Housing
2. PTFE O-Ring
3. Diaphragm
4. Conical Plunger

Note : *wetted parts* are mentioned in italics.

INSTALLATION DRAWING

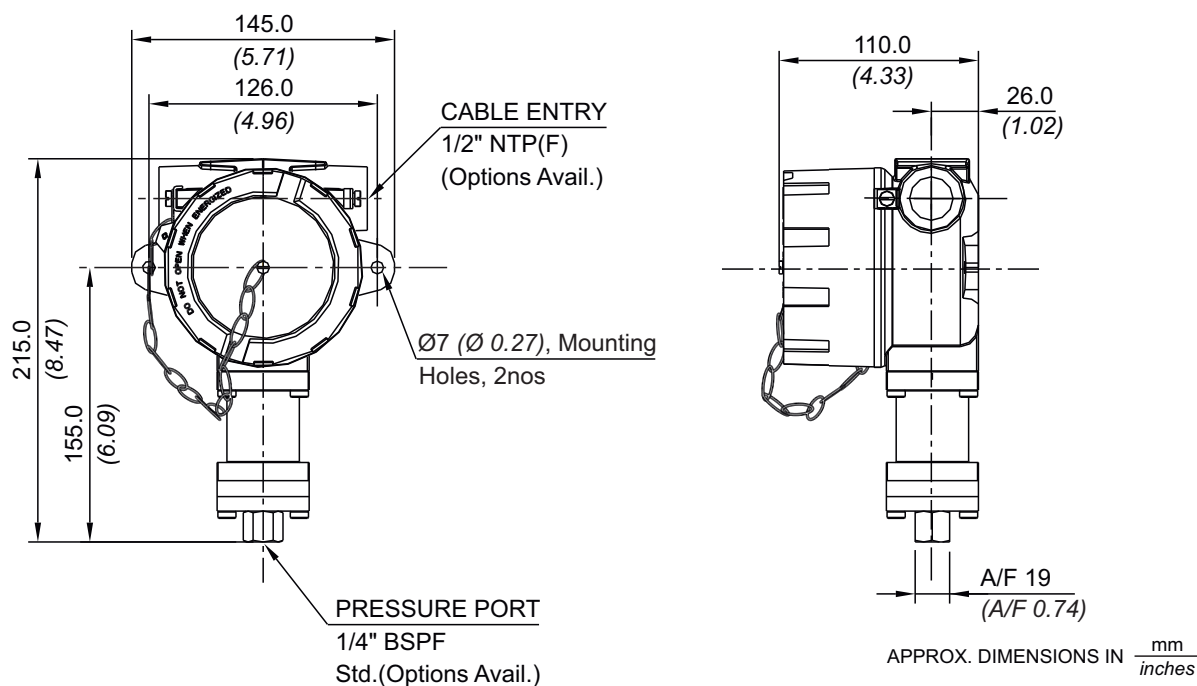

FC/FE HIGH PROOF HIGH RANGE SWITCHES

RANGE SELECTION TABLE

Range Code	Range bar (psi)	Differential* bar (psi)	Maximum Working Pressure bar (psi)
		Approximate Maximum for "A1" microswitch	
P01	0.1 to 1.0 (1.45 to 14.50)	0.20 (2.9)	70.0 (1015.26)
P02	0.1 to 1.5 (1.45 to 21.76)	0.20 (2.9)	70.0 (1015.26)
P03	0.2 to 2.6 (2.90 to 37.71)	0.30 (4.35)	70.0 (1015.26)
P04	0.2 to 3.6 (2.90 to 52.21)	0.40 (5.80)	70.0 (1015.26)
P07	0.5 to 7.0 (7.25 to 101.53)	0.50 (7.25)	70.0 (1015.26)
P10	0.5 to 10.0 (7.25 to 145.04)	0.80 (11.6)	70.0 (1015.26)
P15	1.0 to 15.0 (14.50 to 217.56)	1.50 (21.76)	70.0 (1015.26)
P30	5.0 to 25.0 (72.52 to 362.60)	1.50 (21.76)	70.0 (1015.26)

Note:

1. The minimum differential increases with the setpoint. The differential values mentioned in the above table are approximate maximum for FSR. The differential value will vary according to the pressure range selected and microswitch type. For actual values of differential please contact sales office.



Note: Welded diaphragm also available as shown

2. When using 2SPDT switching arrangement, both microswitches may not actuate and/or deactuate at the same point. A small stage gap, normally upto +/- 5% FSR (depending on range code) may be observed. The On-Off differential (hysteresis) typically tends to be atleast double of those published for 1SPDT pressure switches.

If actuation and/or deactuation at same point is critical part of operation, then it can be achieved by using a separate DPDT relay. This relay will need a separate power supply for it's coil.

HOW TO ORDER FLAMEPROOF HIGH PROOF HIGH RANGE PRESSURE SWITCHES

Group 1	Group 2	Group 3	Group 4	Group 5	Group 6	Group 7	Group 8												
Non standard allocation	Model	Cable Entry Size	Switch Type	Range Code (values in bar)	Microswitch Type	Pressure Port Material / Size	Diaphragm												
☐ A prefix "N" is used in the model code in case of any non standard options / accessories that are provided with the switches. Will be given by manufacturer, only after agreement of supply details with customer. The prefix is subject to change as per specific requirement.	FC = IP66 Flameproof pressure switch, ATEX, IECEx & PESO approved FE = IP66 Flameproof pressure switch, PESO approved	1 = Al. head 1/2" NPT threads 2 = Al. head 3/4" NPT threads 3 = Al. head M20 x 1.5 threads *4 = Grey Cl head 1/2" NPT threads *5 = Grey Cl head 3/4" NPT threads *6 = Grey Cl head M20 x 1.5 threads 7 = SS head 1/2" NPT threads 8 = SS head 3/4" NPT threads 9 = SS head M20 x 1.5 threads	P 1 = pressure switch, fixed differential without scale P 2 = pressure switch, fixed differential with scale in bar P 3 = pressure switch, fixed differential with scale in psi	P01 = (0.1 - 1.0) P02 = (0.1 - 1.5) P03 = (0.2 - 2.6) P04 = (0.2 - 3.6) P07 = (0.5 - 7.0) P10 = (0.5 - 10.0) P15 = (1.0 - 15.0) P30 = (5.0 - 25.0)	A1 = General purpose microswitch rated at 15 A; 250 VAC *A6 = elements with adjustable deadband *A7 = 2SPDT switching elements A8 = General purpose microswitch rated at 5 A, 250 VAC; 5 A, 28 VDC *B7 = 2SPDT Switching Elements C6 = 1SPDT Adjustable Differential Please refer to page nos. 120 & 121 for options and specifications of microswitches * Please contact sales office for additional information	S1 = SS316 / 1/4" BSP(F) S2 = SS316 / 1/4" NPT(F) S3 = (welded diaphragm) SS316 / 1" BSP(M) S4 = SS316 / 1/2" NPT(F) S5 = SS316 / 1/2" NPT(M) H1 = Hastelloy C / 1/4" BSP(F) H2 = Hastelloy C / 1/4" NPT(F) N1 = Monel / 1/4" BSP(F) N2 = Monel / 1/4" NPT(F) More options available, please contact sales office	0 = Neoprene 1 = PTFE 2 = SS 316L 3 = Hastelloy C 4 = Monel												
	Approx. switch weight in Kgs	<table><tr><th>Enclosure</th><th>FC</th><th>FE</th></tr><tr><td>Aluminium</td><td>1.870</td><td>1.370</td></tr><tr><td>Grey Cl</td><td>4.270</td><td>3.770</td></tr><tr><td>SS</td><td>4.420</td><td>3.920</td></tr></table>	Enclosure	FC	FE	Aluminium	1.870	1.370	Grey Cl	4.270	3.770	SS	4.420	3.920					
Enclosure	FC	FE																	
Aluminium	1.870	1.370																	
Grey Cl	4.270	3.770																	
SS	4.420	3.920																	

eg. A high proof high range flameproof switch with 1/2" NPT cable entry in aluminium housing as 1SPDT pressure switch, fixed differential without scale, having 0.1 bar to 1 bar pressure range, with 15 Amp. microswitch, SS316 pressure housing with 1/4" BSP port size & SS316L diaphragm shall be specified by

Group 1	Group 2	Group 3	Group 4	Group 5	Group 6	Group 7	Group 8
☐	FC	1	P1	P01	A1	S1	2

Please specify full model number to avoid ambiguity.

HIGH PROOF HIGH RANGE SWITCHES

FC/FE